

000-安装及初始化

easyBI的安装与其它的插件安装一样，到Atlassian市场下载easyBI插件(确认EasyBI的插件版本与当前安装的插件版本兼容)，进入jira管理插件，上传插件包并更新授权码即可。

安装完在进行初始化之前，请确定准备好数据库以及连接数据库的用户。


easyBI在对JIRA数据进行抽取后，将数据放入到新的数据库中，其中报告的数据配置信息会单独的存在一个数据库中。

因此在进行初始化之前，请对easyBI连接数据库所使用的账户权限进行授权。


安装

本页内容

- 安装
- 初始化
- 数据库准备
 - mysql
 - postgresql
 - ORACLE
- 数据连接配置


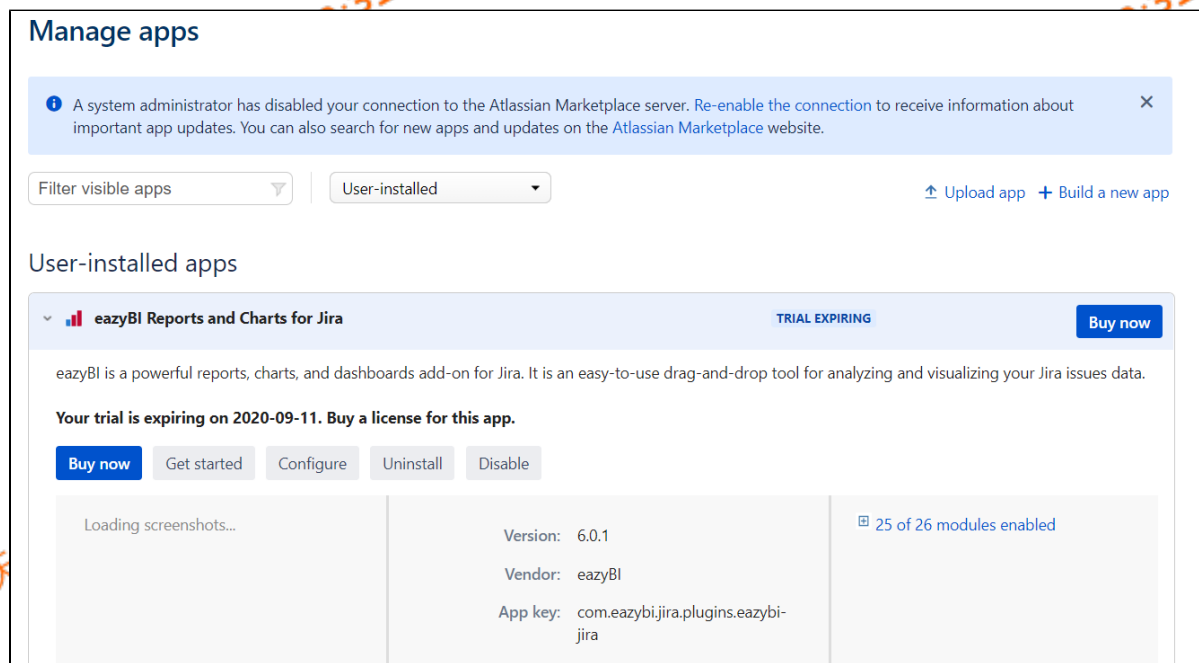


安装完成后，会在最上层菜单中多了easyBI

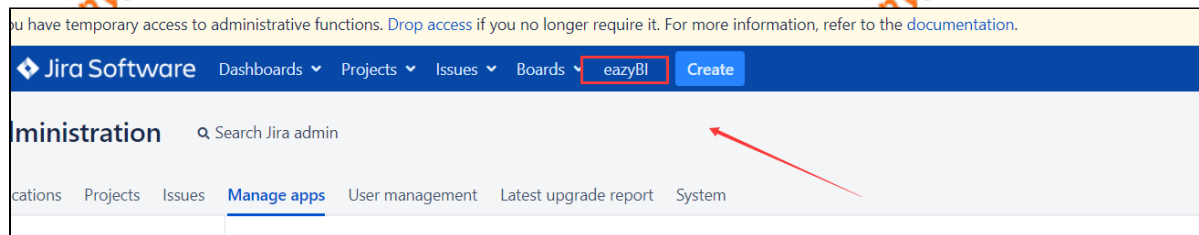

初始化

点击插件管理 》easyBI 展开，点击configure 或者 点击最上层菜单 》easyBI 》右上角setting，进入数据库连接配置

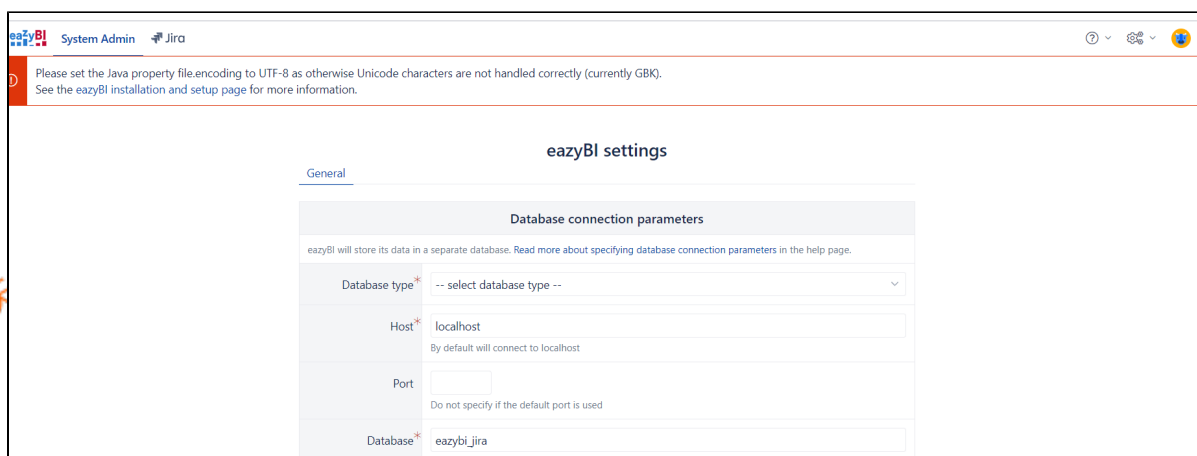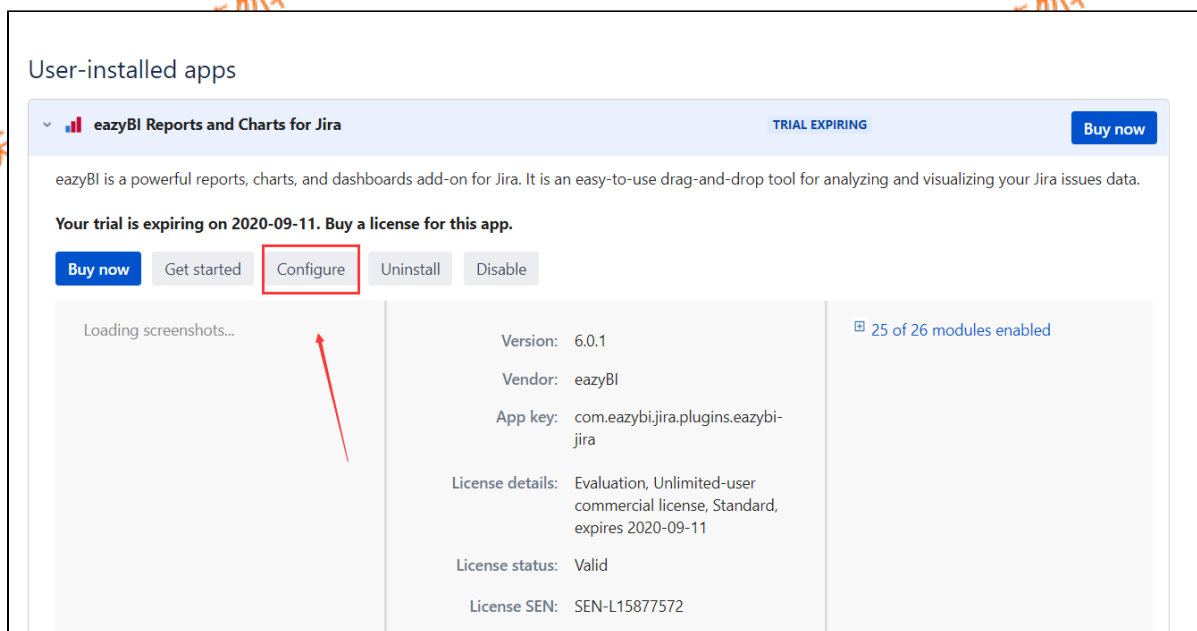

注意这里会提示字符集问题：解决方案 <https://confluence.atlassian.com/adminjiraserver/setting-properties-and-options-on-startup-938847831.html>

数据库准备

连接数据库之前，我们需要为easyBI单独的创建单独的连接数据库的用户，并且拥有**创建数据库**及对创建数据后对表处理的**所有权限**。

以下是创建数据库及用户的脚本信息

mysql

```
GRANT ALL PRIVILEGES ON 'easybi_jira'.* TO 'easybi_jira'@'%' IDENTIFIED BY 'password';
```

说明

在easybi里每创建一个account，都会在数据库实例中创建一个库，所以每个库都要做上的授权。在一些版本中以上的语句有时候并不生效，可以为系统一次性多创建一些库。

每一个account对应的库，大致规则 如下 easybi_jira_dwh_N

```
CREATE DATABASE eazybi_jira_dwh_1 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_2 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_3 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_4 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_5 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_6 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_7 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_8 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_9 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;
CREATE DATABASE eazybi_jira_dwh_10 CHARACTER SET utf8mb4 COLLATE utf8mb4_bin;

GRANT ALL PRIVILEGES ON eazybi_jira_dwh_1.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_2.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_3.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_4.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_5.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_6.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_7.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_8.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_9.* TO 'eazybi_jira'@'%';
GRANT ALL PRIVILEGES ON eazybi_jira_dwh_10.* TO 'eazybi_jira'@'%';
```

postgresql

```
CREATE ROLE eazybi_jira PASSWORD 'secret' LOGIN CREATEDB;
```

ORACLE

```
CREATE USER eazybi_jira IDENTIFIED BY secret DEFAULT TABLESPACE users;
GRANT CONNECT, RESOURCE TO eazybi_jira;
```

数据连接配置

easyBI settings

[General](#) [License](#) [Additional](#) [Advanced settings](#)

Database connection parameters

easyBI will store its data in a separate database. [Read more about specifying database connection parameters in the help page.](#)

Database type*

Host*
By default will connect to localhost

Port
Do not specify if the default port is used

Use SSL ☐

Database*
Please use a dedicated database for easyBI. It should be owned by the following username.

Username*
At first create this user in the database server with permission to create the specified database

Password
Enter a user password or leave blank if no password is used

[Edit database advanced settings](#)

Test connection